



ROGO

COMMERCIAL GRADE BOLLARD LIGHT



HEAVY DUTY CONSTRUCTION:

Built to last, ROGO features a rugged extruded aluminum housing paired with a precision die-cast head—delivering long lasting durability and structural integrity. Designed to handle tough conditions it ensures long-term reliability in any outdoor environment.

FIELD SELECTABLE:

ROGO offers selectable wattage and color temperature, giving you the flexibility to tailor light output and ambiance to each project. Choose from 3000K, 4000K, or 5000K for the perfect Kelvin temperature, and adjust between 20w, 28w, or 38w based on your specific needs.

HIGH IMPACT POLYCARBONATE OPTICS:

A precision-engineered aluminum reflector ensures maximum light efficiency, distributing illumination in a wide, uniform Type V pattern—ideal for open areas where full 360-degree coverage is essential.

PRODUCT DESCRIPTION

Transform your outdoor space with the ROGO, this bollard blends uncompromising strength with a contemporary design. Built to perform in the harshest conditions, this heavy-duty bollard delivers powerful, uniform illumination with a sleek profile that enhances the visual appeal of any landscape.



SPECIFICATION FEATURES

LISTINGS	UL, Cul, DLC, RoHS Listed for Wet Locations.
LENS	High Impact Polycarbonate
HOUSING	Heavy Duty Extruded Aluminum body Die-Cast Aluminum Head
FINISH	Bronze Powder-coat for Corrosion Resistance
MOUNTING	All mounting hardware and anchor bolts.
ADD-ONS	Standard 4KV Surge Protection

Clear UV-resistant polycarbonate lens ensures optimal light output while shielding the light engine from harsh environment.

Airtight design blocks moisture and condensation—ensuring lasting performance.



Engineered aluminum reflector reduces glare and spreads light evenly.

Driver mounted below LED compartment for easy access and protection from water buildup.

Built tough with extruded aluminum to seal and protect wiring. While offering strength and durability.

Weight 30 lbs




Performance Data

Model #	Distribution	Lumens
AF55XGRPL10ASV37345K AF55XGRPL10ACV37345K	Type V	4,749 4,738

Specifications / Ordering Information


Model #	Selectable Wattage	CCT Selectable	CRI	Style	Voltage	Color Finish	Operating Temperature
AF55XGRPL10ASV37345K AF55XGRPL10ACV37345K	20/28/38W	3000K 4000K 5000K	80+	Dome Top Flat Top	120-277v 347-480v	Bronze Powder-coat	-40°C

PHOTOMETRIC PERFORMANCE

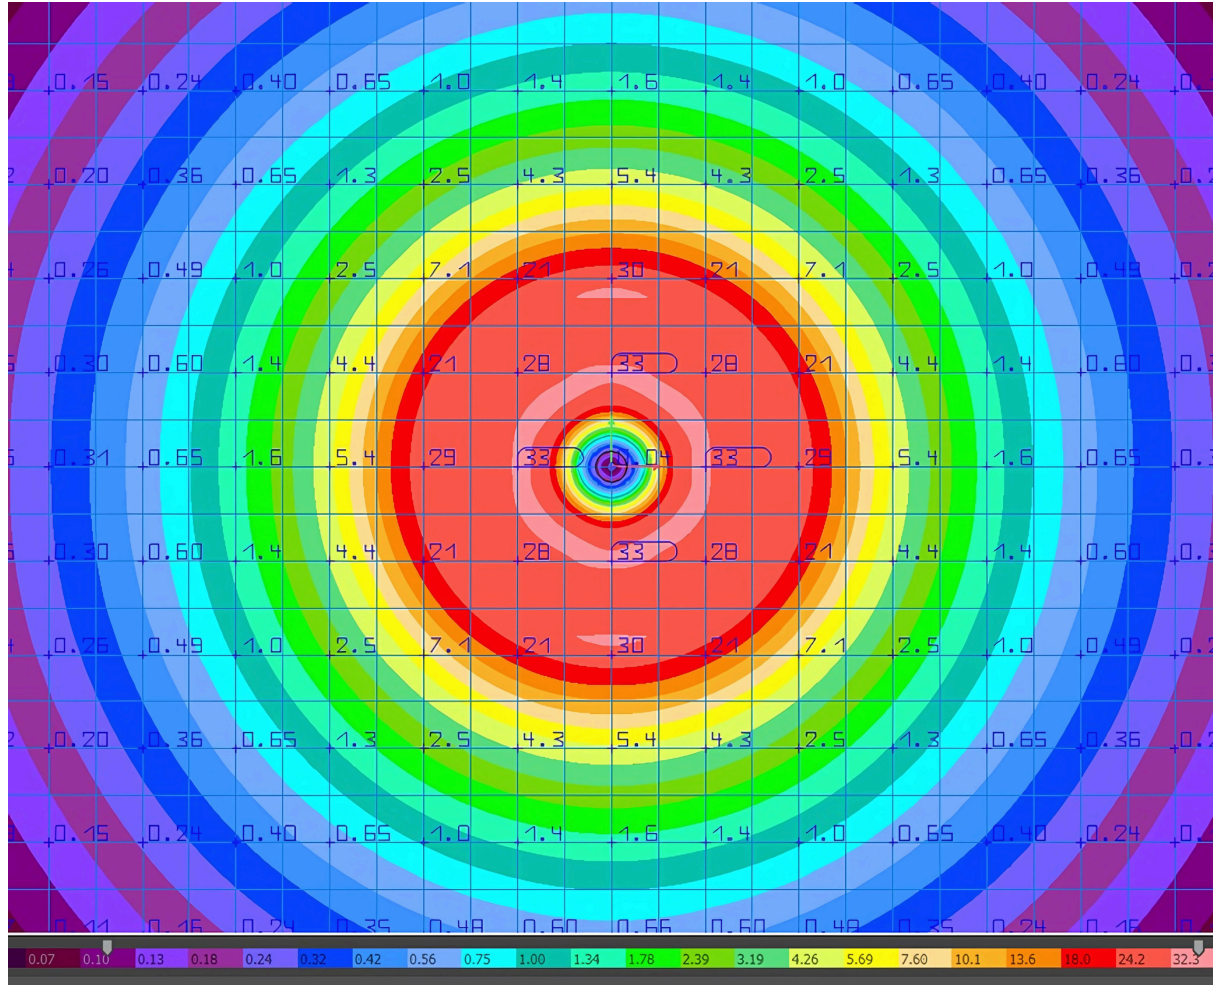

1 footcandle or more of light distributed over a 9 foot diameter facilitates efficient 18' spacing for most applications.

DIMENSIONS

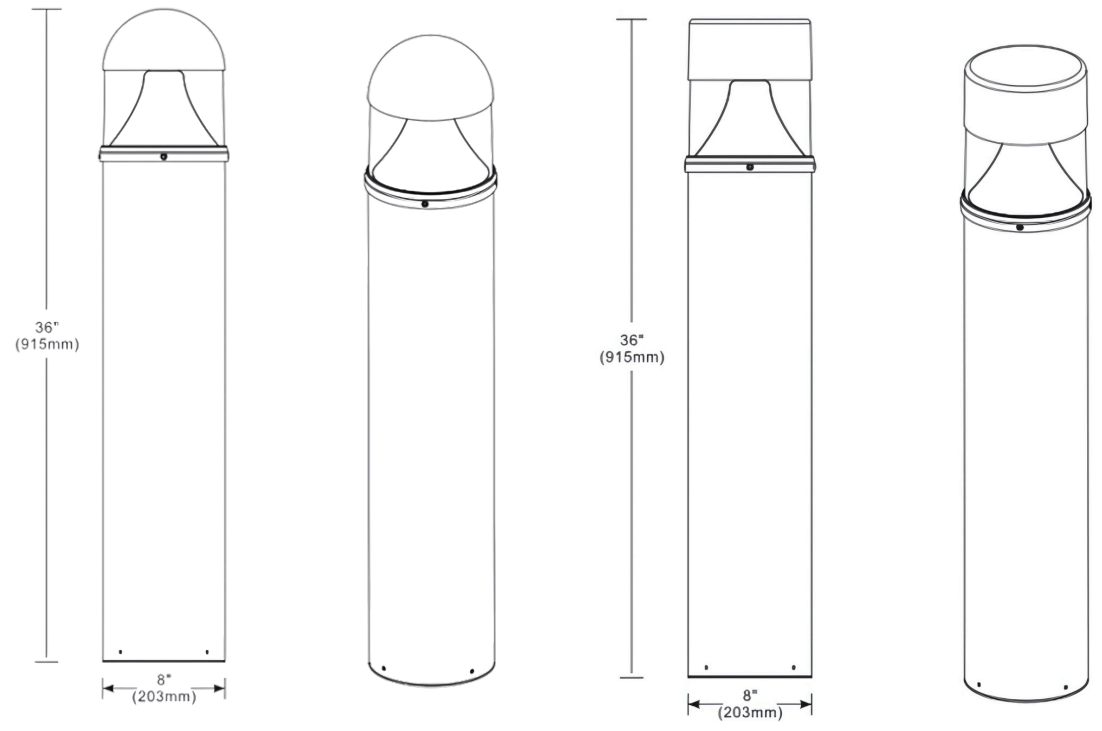

VERSATILE MOUNTING

